

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: GAV

APPLICATION	• PENDANT MOUNT • INDOOR OR OUTDOOR RATED
DIMENSION	• 9", 10", 12", 15", 18", 20" (23CM, 25CM, 31CM, 38CM, 46CM, 51CM)
ILLUMINATION	• DIRECT • LED 90CRI • 897 - 2,912 LUMENS
ELECTRICAL	• 120V, 277V AND 347V • 10KA SURGE SUPPRESSION STANDARD
DIFFUSERS	• CLEAR OR FROSTED, ELONGATED GLOBE
MOUNTING	• 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLE • 1" TO 60" (2.5CM TO 152CM) STEM MOUNT
CONSTRUCTION	• ALUMINUM, SOLID COPPER OR STEEL
FINISHES	• AVAILABLE IN SEVERAL TMS SPECIALTY, AND POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	• 7.65 LBS MAXIMUM



GAVA™ PENDANT



PROJECT: _____
 TYPE: _____
 QUANTITY: _____

GAV

1 2 3 4 5 6 7 8 9 10 11 12 13


1.	I					O									
APPLICATION	INDOOR					OUTDOOR									
2.	9 ¹	10 ¹	12 ²	15 ²	18 ³	20 ³									
DIAMETER	9"DIA. (23CM)	10"DIA. (25CM)	12"DIA. (31CM)	15"DIA. (38CM)	18"DIA. (46CM)	20"DIA. (51CM)									
3.	100IN	200IN	15LED	16LED	19LED	32LED									
ILLUMINATION ⁴	MED BASE (MAX 100W INC)	MED BASE (MAX 100W INC)	15W LED	16W LED PAR38 E26 MED. BASE, 40° 1400 LUMENS (27/30/35/40/50K) REFER TO PAGE 6	19W LED	32W LED									
4.	CRD	C01	C06	C12	C18	C24	C36	C48	C60						
MOUNTING	120"(305CM) DROP CORD	1"(2.5CM) STEM MOUNT	6"(15CM) STEM MOUNT	12"(31CM) STEM MOUNT	18"(46CM) STEM MOUNT	24"(61CM) STEM MOUNT	36"(91CM) STEM MOUNT	48"(122CM) STEM MOUNT	60"(152CM) STEM MOUNT						
5.	----			BC			WC								
CORD	NONE			BLACK DROP CORD			WHITE DROP CORD								
6.	----		30K		35K		40K								
LED CCT	NONE		3000		3500		4000								
7	120			277			347								
VOLTAGE	120V			277V			347V								
8.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART			F04	F05	F15	F16	F09	F31	F18					
FINISH ⁵				MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM					
				F06	F07	F08	F10	F11	F13	F14	F21	F22	F23		
				CLAY BROWN	ZEUS BROWN	MIDNIGHT BLUE	FIRE RED	CITRUS ORANGE	FOREST GREEN	SUNSHINE YELLOW	ARCH. BRONZE	HARVEST GOLD	MELTED PLATINUM		
9.	----	G1	G2	G9	G11	G12									
GLOBE/ LENS	NONE	CLEAR, ELONGATED GLOBE	FROSTED GLOBE	CLEAR, ELONGATED LARGE GLOBE	CLEAR, ELONGATED GLOBE WITH CAST GUARD	CLEAR, ELONGATED LARGE GLOBE WITH CAST GUARD									
10.	----				DIML										
DIMMING	NONE				LED DIMMING (0 - 10V, CURRENT - SINKING)										
11.	----	EM	EMC	EMR	EMCR										
EMERGENCY ⁶	NONE	INTEGRAL	INTEGRAL COLD PACK	REMOTE	REMOTE COLD PACK										
12.	----			BL		ACC									
MOUNTING ⁷ ACCESSORIES	NONE			CEILING SLOPE ADAPTER FOR STEM MOUNT (30°)		AIRCRAFT CABLE FOR DROP CORDS									
13.	----	W10	W12	W15	W18	W20									
WIRE GUARD	NONE	10" (25CM) WIRED GUARD	12" (31CM) WIRED GUARD	15" (38CM) WIRED GUARD	18" (46CM) WIRED GUARD	20" (51CM) WIRED GUARD									

1. SIZES 9" AND 10" ARE NOT AVAILABLE FOR 200IN, 19LED AND 32LED 2. SIZES 12" AND 15" ARE NOT AVAILABLE FOR 200IN AND 32LED 3. SIZES 18" AND 20" ARE NOT AVAILABLE FOR 15LED 4. INCANDESCENT AND 16W LED PAR LAMP USES A MEDIUM BASE SOCKET (E26) 5. A CLEAR COAT IS APPLIED TO COPPER. PATINA WILL FORM OVER TIME


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING


GAV 9"
4.5LB




GAV 10"
4.9LB




GAV 12"
5.65LB




GAV 15"
6LB

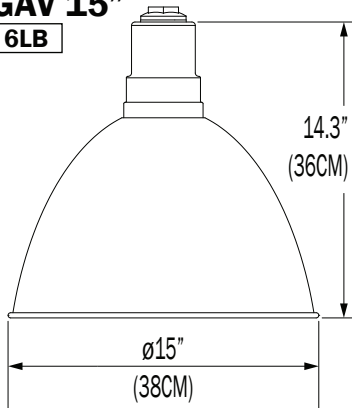


GAV 18"
6.75LB

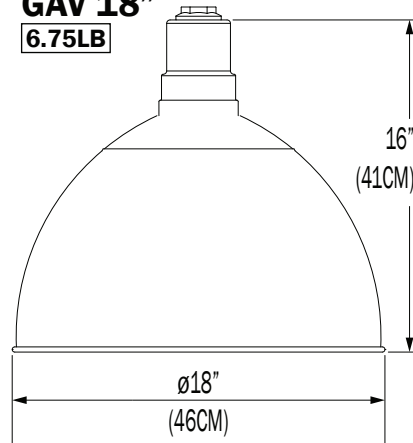


GAV 20"
7.65LB

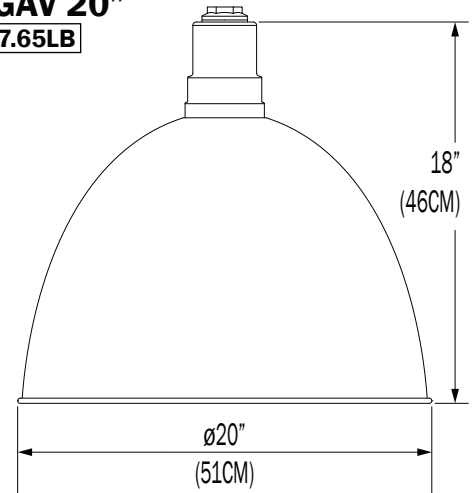


DROP CORD MOUNT W/ AIRCRAFT CABLE

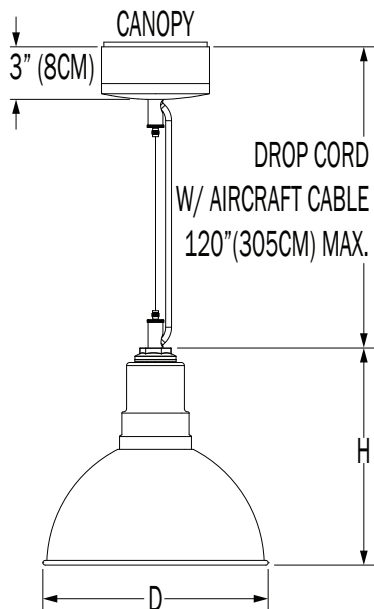

DROP CORD MOUNT

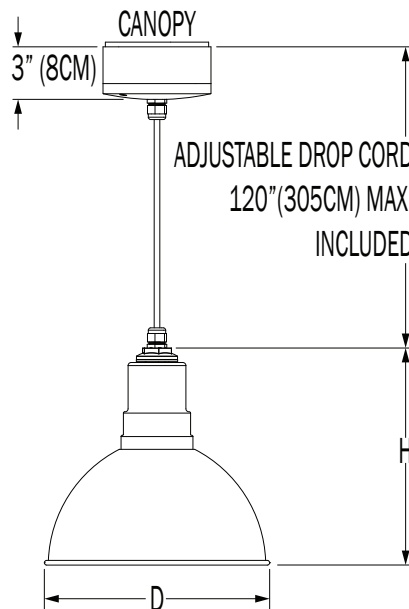

STEM MOUNT

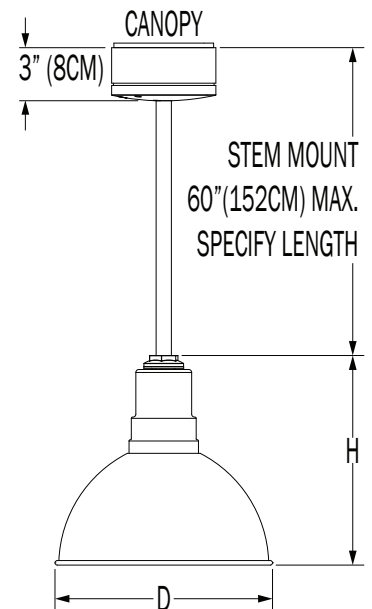

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>


DIRECT

PN	SIZE (DIA)	ILLUMINATION	LUMENS	WATTAGE
GAV	9	100IN	950	100
		15LED	1095	15
	10	100IN	1165	100
		15LED	1087	15
	12	15LED	1092	15
		19LED	1876	19
	15	100IN	1235	100
		15LED	1091	15
		19LED	1862	19
	18	100IN	897	100
		200IN	2534	200
		19LED	1870	19
	20	32LED	2912	32
		200IN	2471	200
		19LED	1858	19
		32LED	2906	32

IES INDOOR REPORT

PHOTOMETRIC FILENAME : GAV 9 100INC.IES

POLAR GRAPH

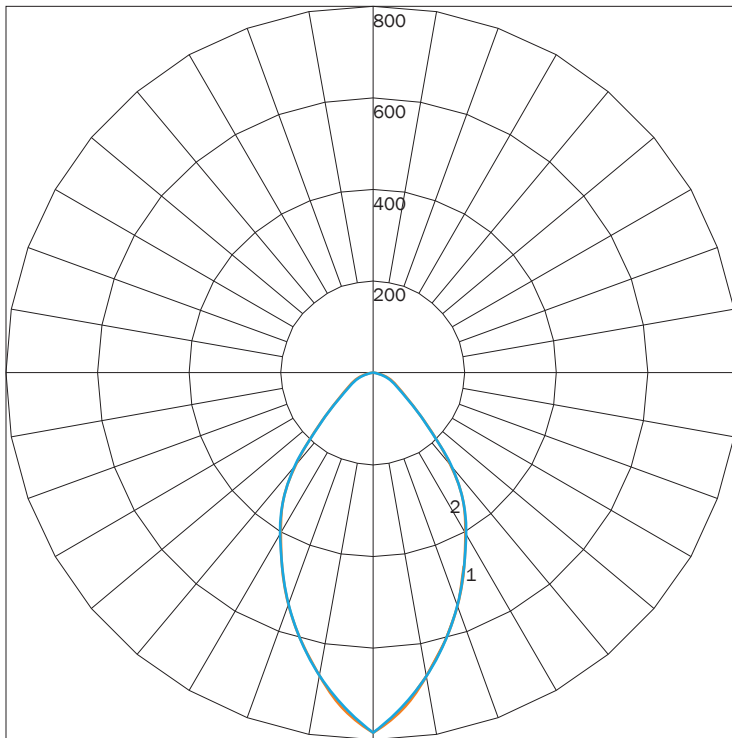

MAXIMUM CANDELA = 784.09 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

950

TOTAL LUMINAIRE EFFICIENCY

56%

LUMINAIRE EFFICACY RATING

10


TOTAL LUMINAIRE WATTS

100

IES INDOOR REPORT

PHOTOMETRIC FILENAME : GAV 20 32LED.IES

POLAR GRAPH

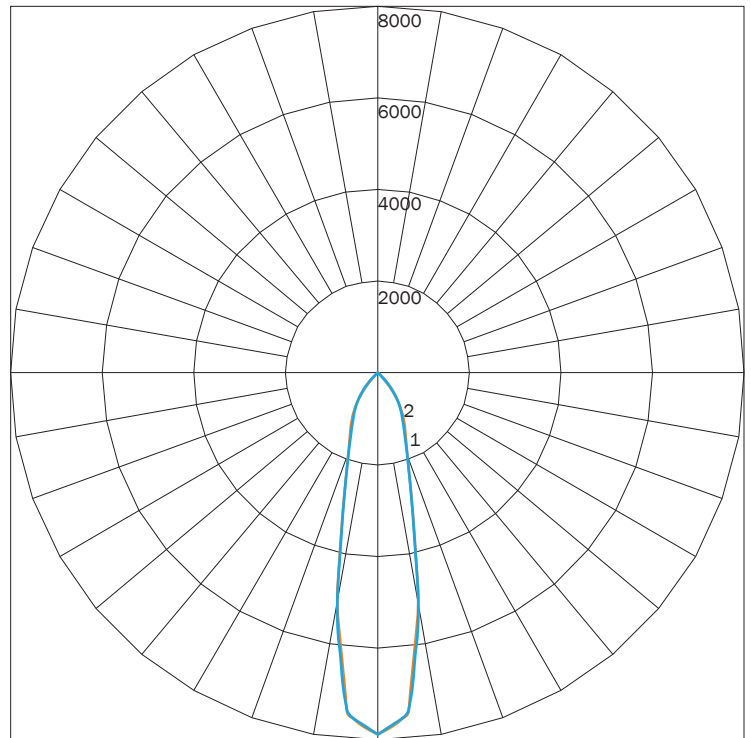

MAXIMUM CANDELA = 7887.39 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

2906

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

80

TOTAL LUMINAIRE WATTS

36

FINISHES



PREMIUM FINISHES



PREMIUM MATERIALS



1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE.

MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.

16W LED PAR 38 MED BASE, 40° (SUPPLIED)

HD-PAR/I90/5CCT



FEATURES & BENEFITS

5 FIELD SELECTABLE CCT'S (27/30/35/40/50K)

HIGH CRI (90+)


GLASS LENS

25,000 HRS AVERAGE LIFE

WET LOCATION RATED

DIMMABLE

DIMENSIONAL DRAWING

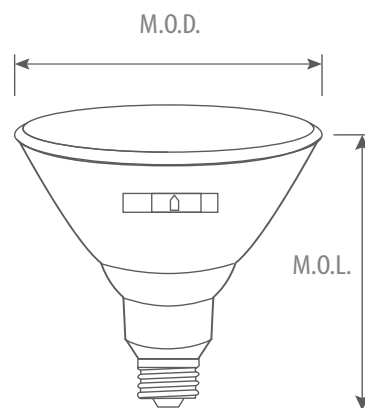

MODEL NUMBER	WATTAGE (W)	BASE	VOLTAGE (V)	HOUR RATING	BEAM ANGLE	INITIAL LUMENS(LM)	CCT(K)	CRI	ENCLOSED FIXTURE APPLICATION	WET LOCATION	M.O.D. (INCH)	M.O.L. (INCH)	CASE QTY.
16W LED	16	E26	120	25,000	40°	1400	27/30/35/40/50	90	NO	YES	4.8	5.31	20

TMSLIGHTING

INDOOR OUTDOOR

