

GENESIS HL™ PENDANT

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: 912HL

APPLICATION	• PENDANT MOUNT • INDOOR RATED
DIMENSION	• 12.25" (31CM)
ILLUMINATION	• DIRECT • LED 90CRI • 1,218 - 1,867 LUMENS
ELECTRICAL	• 120V, 277V, AND 347V • 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	• HIGH EFFICIENCY ACRYLIC
MOUNTING	• 120" (305CM) BLACK OR WHITE DROP CORD W/ AIRCRAFT CABLE • 1" TO 60" (2.5CM TO 152CM) STEM MOUNT
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	• 5 LBS MAXIMUM



TMSLIGHTING



GENESIS HL™ PENDANT



PROJECT: _____
 TYPE: _____
 QUANTITY: _____

912HL

1 2 3 4 5 6 7 8 9

1.	ILLUMINATION									
	15LED				19LED					
LED (W)	15W				19W					
LUMENS	1218				1867					
2.	CRD	C06	C12	C18	C24	C36	C48	C60		
MOUNTING	120"(305CM) DROP CORD	6"(15CM) STEM MOUNT	12"(31CM) STEM MOUNT	18"(46CM) STEM MOUNT	24"(61CM) STEM MOUNT	36"(91CM) STEM MOUNT	48"(122CM) STEM MOUNT	60"(152CM) STEM MOUNT		
3.	30K			35K			40K			
LED CCT	3000			3500			4000			
4.	120			277			347			
VOLTAGE	120V			277V			347V			
5.	F04	F05	F09	F15	F16	F18	F24	F25	F26	F31
FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALLUMINUM	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC
	F33	RAL								
	PYRITE BRONZE	CUSTOM (SPECIFY)								
6.	F04	F05	F09	F15	F16	F18	F24	F25	F26	F31
ACCENT FINISH	MATTE WHITE	GLOSS WHITE	PEWTER	MATTE BLACK	GLOSS BLACK	SATIN ALLUMINUM	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC
	F33	RAL								
	PYRITE BRONZE	CUSTOM (SPECIFY)								
7.	---					DIML				
DIMMING	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)				
8.	---					EMR				
EMERGENCY ¹	NONE					REMOTE				
9.	BL					ACC				
MOUNTING ² ACCESSORIES	CEILING SLOPE ADAPTER FOR STEM MOUNT (30°)					AIRCRAFT CABLE FOR DROP CORDS				

1. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS
 2. MAY REQUIRE TO COMPLY WITH LOCAL SEISMIC/EARTHQUAKE CODE


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING




GENESIS HL™ PENDANT

DROP CORD MOUNT W/ AIRCRAFT CABLE


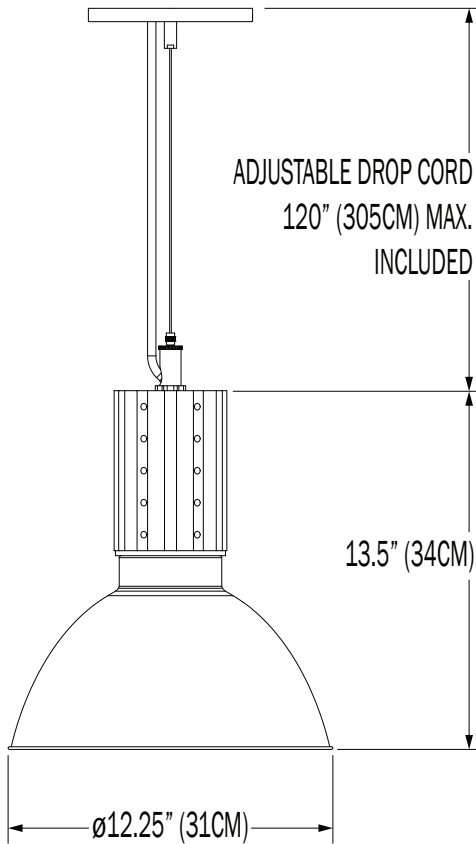


PROFILE

STEM MOUNT

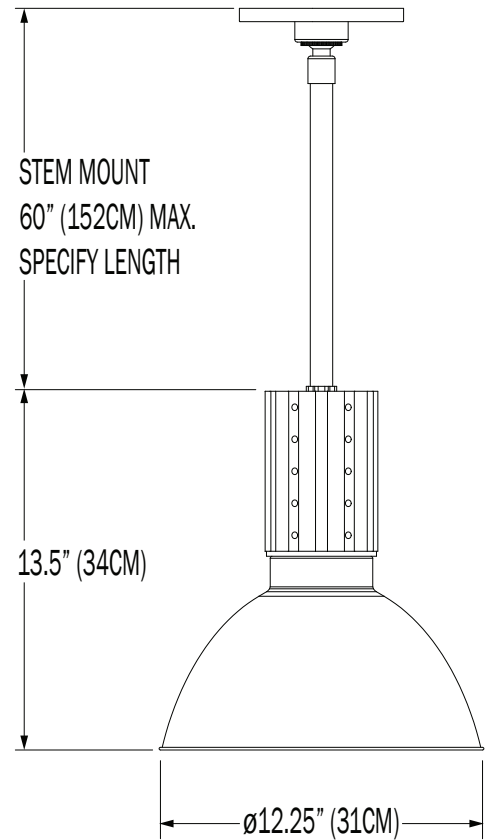

BOTTOM




DIRECT

PN	ILLUMINATION	LUMENS	WATTAGE
912HL	15LED	1218	15
	19LED	1867	19

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 912HL 15LED F05.IES

POLAR GRAPH

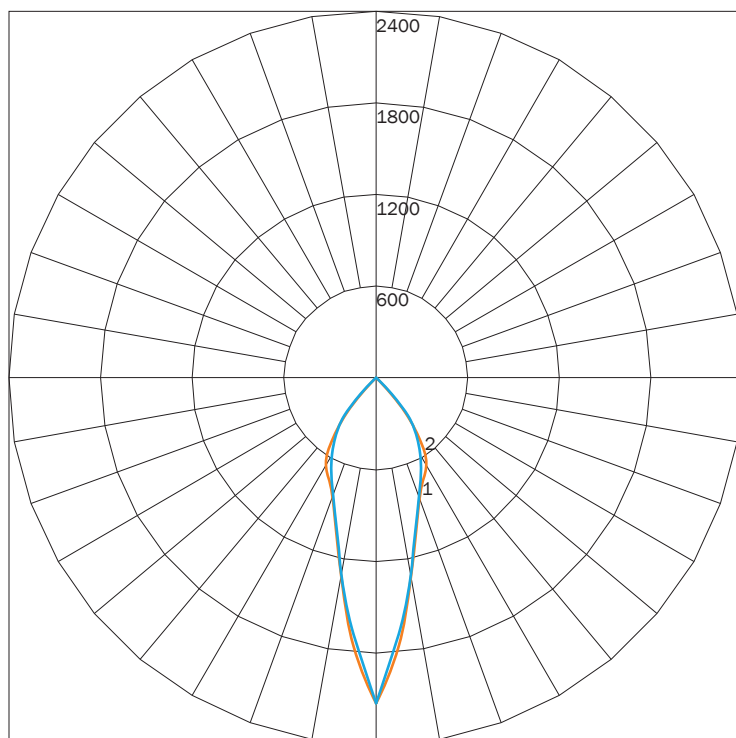

MAXIMUM CANDELA = 2128.34 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

1218

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

71


TOTAL LUMINAIRE WATTS

17

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 912HL 19LED F05.IES

POLAR GRAPH

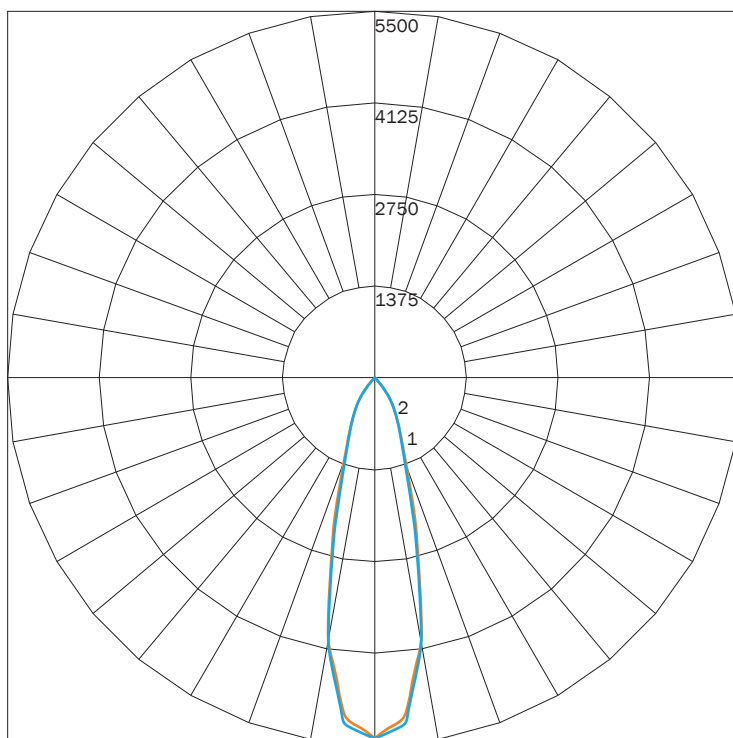

MAXIMUM CANDELA = 5410.87 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

1867

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

85

TOTAL LUMINAIRE WATTS

22

AVAILABLE FINISHES



F04¹
MATTE
WHITE



F05¹
GLOSS
WHITE



F09¹
PEWTER



F15
MATTE
BLACK



F16
GLOSS
BLACK



F18¹
SATIN
ALUMINUM



F24¹
MELTED
PLATINUM



F25¹
MELTED
GOLD



F26¹
MELTED
COPPER



F31¹
SILVER
METALLIC



F33¹
PYRITE
BRONZE



RAL
CUSTOM
COLOR
(RAL #)

1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.