

PROJECT: _____

TYPE: _____

QUANTITY: _____



PN: 33W

APPLICATION	• WALL MOUNT • INDOOR OR OUTDOOR RATED
DIMENSION	• 16" (40CM)
ILLUMINATION	• DIRECT • LED 90CRI • 1,111 - 2,259 LUMENS
ELECTRICAL	• 120V, 277V, AND 347V • 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	• CLEAR OR FROSTED, ELONGATED, GLASS GLOBE
DRIVER	• WALL MOUNT (INTEGRAL) • REMOTE MOUNT (INDOOR OR OUTDOOR)
MOUNTING	• WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	• ALUMINUM
FINISHES	• AVAILABLE ANODIZED, BRUSHED, AND IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING
WEIGHT	• 6.25LB





JAZZ™ WALL

PROJECT: _____

TYPE: _____

QUANTITY: _____

33W

1 2 3 4 5 6 7 8 9

1.	I					O				
APPLICATION	INDOOR					OUTDOOR				

2.	150IN					15LED				
ILLUMINATION	150W INC					15W LED				
LED (W)	150W					15W				
LUMENS	2259					1111				

3.	---		30K		35K		40K		
LED CCT	NONE		3000K		3500K		4000K		

4.	120		277			347		
VOLTAGE	120V		277V			347V		

5.	---		WM		N1		N4		
DRIVER	NONE		WALL MOUNT (INTEGRAL)		REMOTE INDOOR MOUNT (NEMA 1)		REMOTE OUTDOOR MOUNT (NEMA4)		

6.	F04	F05	F15	F16	F09	F31	F18	F06	F07	F08
FINISH	MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM	CLAY BROWN	ZEUS BROWN	MIDNIGHT BLUE
	F10	F11	F13	F14	F21	F22	F24	F25	F26	F28
	FIRE RED	CITRUS ORANGE	FOREST GREEN	SUNSHINE YELLOW	ARCH. BRONZE	HARVEST GOLD	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	DARK CAMPAGNE
	F32	F33	F38	F39	F40	F41	F42	F43	F45	BR
	BRONZE METALLIC	PYRITE BRONZE	BURNT ORANGE	AQUA BLUE	BUBBLE PINK	ELECTRIC PURPLE	FAUX CHROME	FAUX GOLD	COPPER METALLIC	BRUSHED ALUMINUM
	AN	RAL								
	ANODIZED	CUSTOM (SPECIFY RAL)								

7.	---					DIML				
DIMMING	NONE					LED DIMMING (0 - 10V, CURRENT - SINKING)				

8.	---		EM		EMC		EMR		EMCR	
EMERGENCY ¹	NONE		INTEGRAL		INTEGRAL COLD PACK		REMOTE		REMOTE COLD PACK	


9.	---		G1			G2		
GLOBE/LENS	NONE		CLEAR, ELONGATED GLOBE			FROSTED GLOBE		

1. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

33W

PROFILE

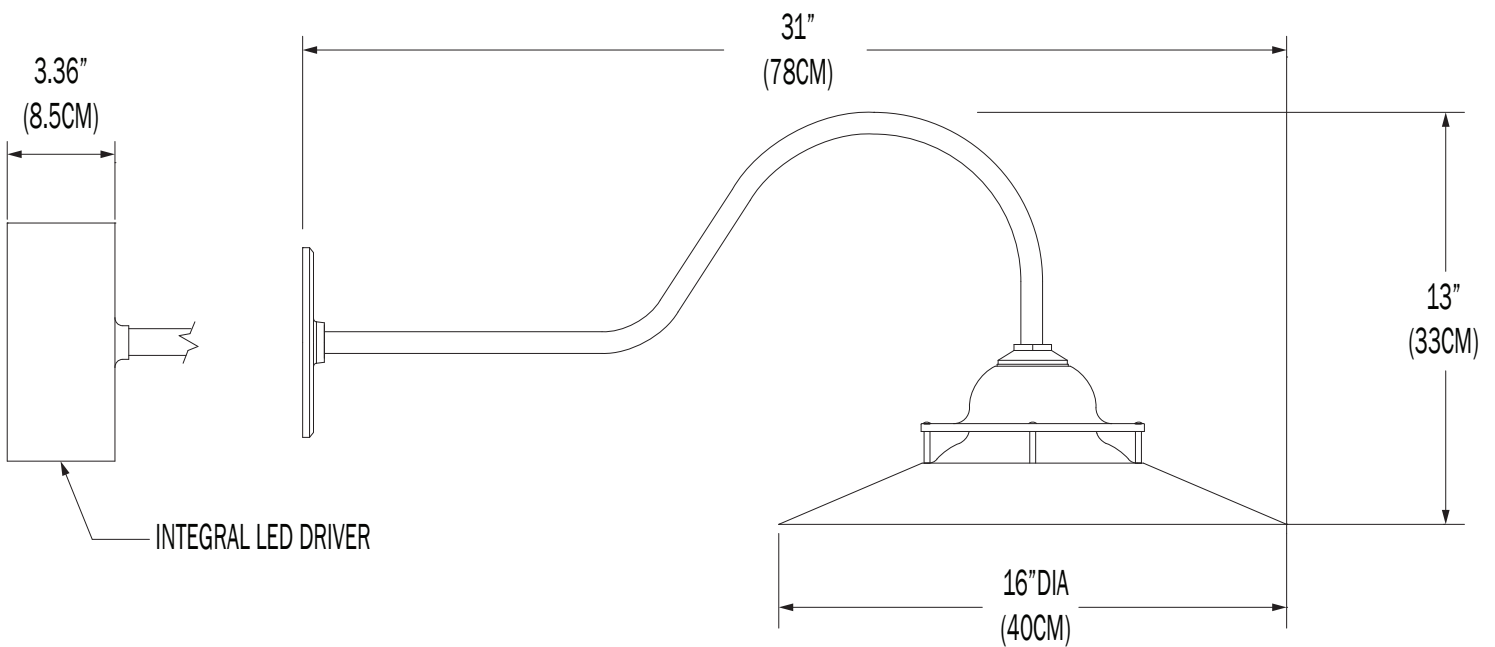

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>


DIRECT

PN	PN	LUMENS	WATTAGE
33W	15LED	1111	15
	100INC	2259	150

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 33W 15LED F05.IES

POLAR GRAPH

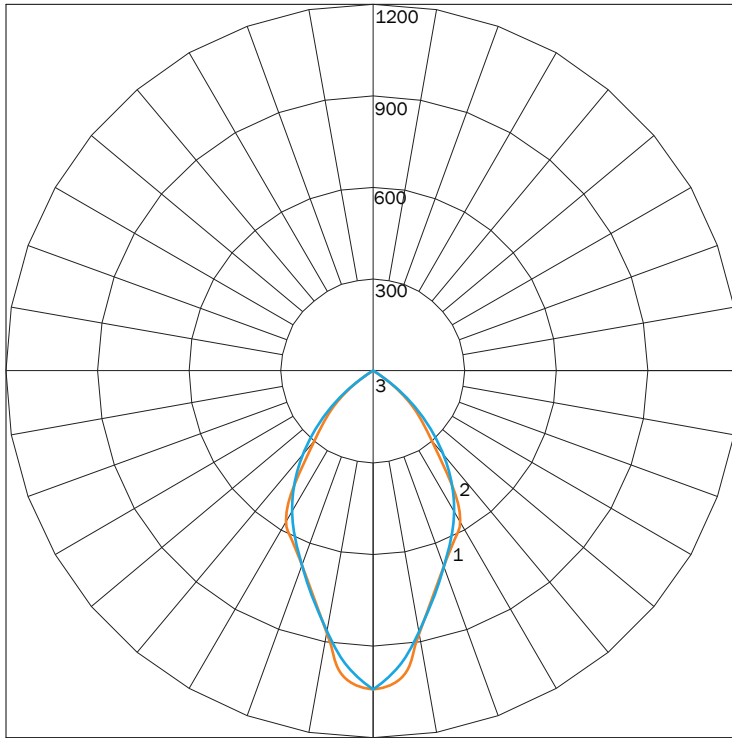

MAXIMUM CANDELA = 1040.44 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 0
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)
 # 3 - HORIZONTAL CONE THROUGH VERTICAL ANGLE (90)

LUMINAIRE LUMENS

1111

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

65


TOTAL LUMINAIRE WATTS

17

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 33W 150IN F05.IES

POLAR GRAPH

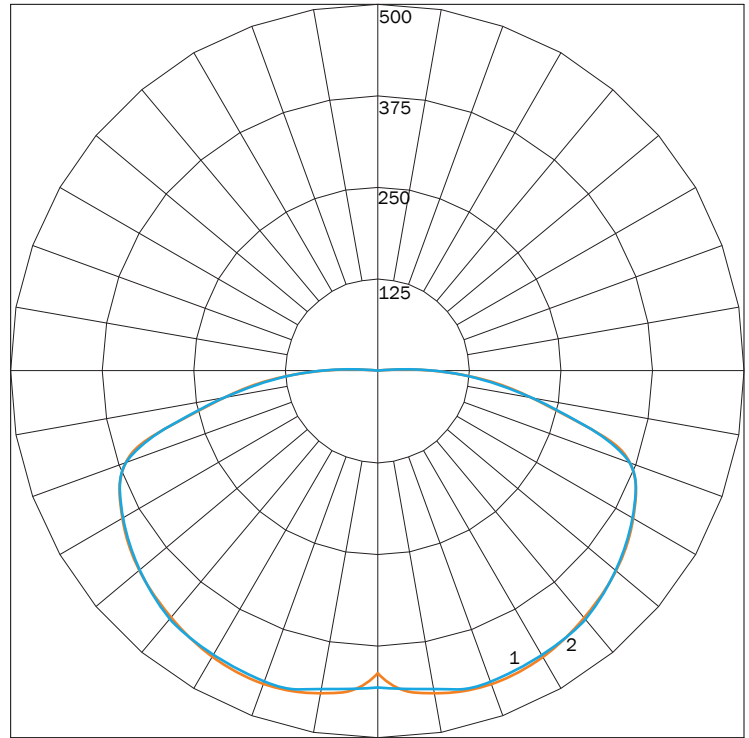

MAXIMUM CANDELA = 452.148 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 15
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

2259

TOTAL LUMINAIRE EFFICIENCY

85%


LUMINAIRE EFFICACY RATING

15

TOTAL LUMINAIRE WATTS

150

FINISHES

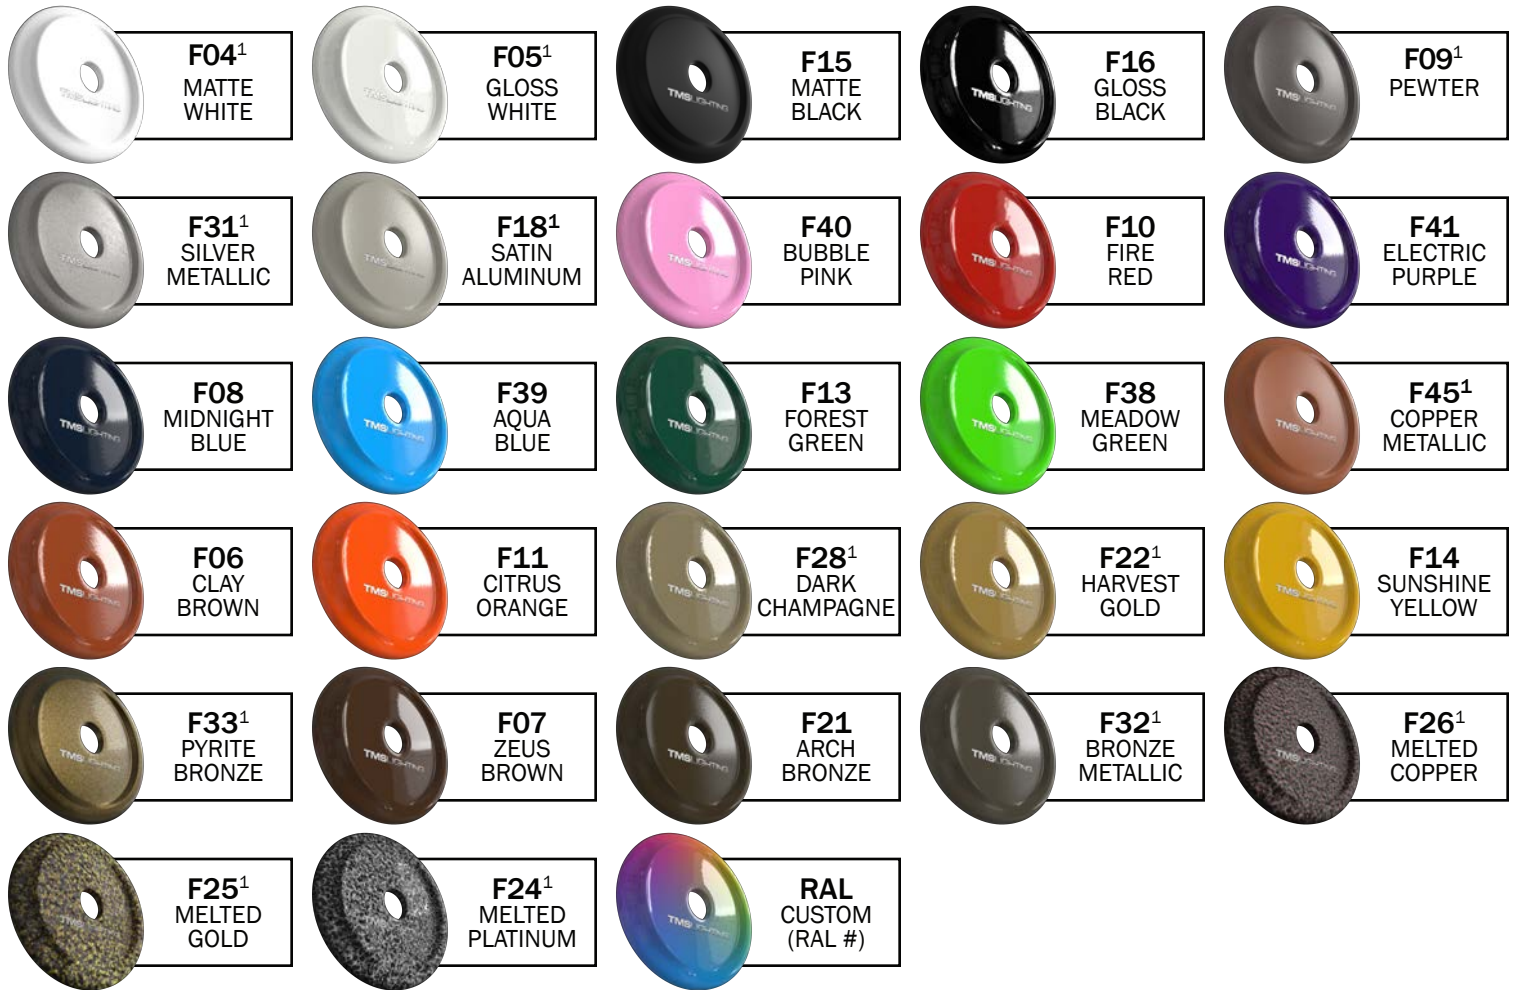

PREMIUM FINISHES



PREMIUM MATERIALS



1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE. MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.