


# RICHMOND HS™ SCONCE

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

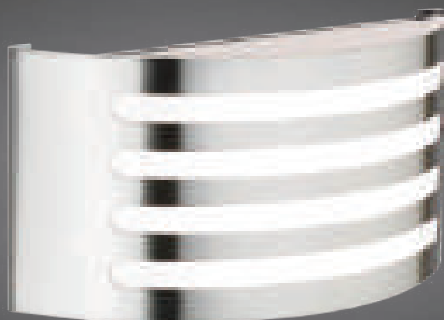

## PN: RI600HS

<b>APPLICATION</b>	<ul style="list-style-type: none"><li>• WALL MOUNT</li><li>• INDOOR RATED</li><li>• ADA COMPLIANT</li></ul>
<b>DIMENSION</b>	<ul style="list-style-type: none"><li>• 5.37"W X 12.5"H (13.7CM X 32CM)</li><li>• DEPTH: 3.87" (9.9CM)</li></ul>
<b>ILLUMINATION</b>	<ul style="list-style-type: none"><li>• DIFFUSE</li><li>• LED 90CRI</li><li>• 538 LUMENS</li></ul>
<b>ELECTRICAL</b>	<ul style="list-style-type: none"><li>• 120V, 277V AND 347V</li><li>• 10kA SURGE SUPPRESSION STANDARD</li></ul>
<b>DIFFUSERS</b>	<ul style="list-style-type: none"><li>• HIGH EFFICIENCY ACRYLIC</li></ul>
<b>MOUNTING</b>	<ul style="list-style-type: none"><li>• WALL, MOUNTED TO A 4"(10CM) J-BOX</li></ul>
<b>CONSTRUCTION</b>	<ul style="list-style-type: none"><li>• STEEL</li></ul>
<b>FINISHES</b>	<ul style="list-style-type: none"><li>• AVAILABLE IN SEVERAL TMS PLATED, AND POWDER COATED FINISHES</li><li>• CUSTOM RAL FINISHES AVAILABLE</li></ul>
<b>DIMMING</b>	<ul style="list-style-type: none"><li>• 0 - 10V STANDARD DIMMING</li></ul>



DIFFUSE



# RICHMOND HS™ SCONCE

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

## RI600HS

1      2      3      4      5      6      7      8

<b>1.</b>	<b>ILLUMINATION</b>									
	<b>10LED</b>									
	LED (W)	10W								
LUMENS	538									
<b>2.</b>	<b>30K</b>			<b>35K</b>			<b>40K</b>			
	LED CCT	3000		3500			4000			
<b>3.</b>	<b>120</b>			<b>277</b>			<b>347</b>			
	VOLTAGE	120V		277V			347V			
<b>4.</b>	---			<b>INTD</b>			<b>RMD</b>			
	DRIVER	NONE		INTEGRAL DRIVER			REMOTE DRIVER			
<b>5.</b>	<b>SN</b>	<b>CH</b>	<b>BC</b>	<b>AC</b>	<b>AB</b>	<b>SB</b>	<b>PB</b>	<b>F04</b>	<b>F05</b>	<b>F09</b>
	SATIN NICKEL	CHROME	BLACK CHROME	ANTIQUE COPPER	ANTIQUE BRASS	SATIN BRASS	POLISHED BRASS	MATTE WHITE	GLOSS WHITE	PEWTER
	<b>F15</b>	<b>F16</b>	<b>F18</b>	<b>F24</b>	<b>F25</b>	<b>F26</b>	<b>F31</b>	<b>F33</b>	<b>RAL</b>	
FINISH	MATTE BLACK	GLOSS BLACK	SATIN ALUMINUM	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	SILVER METALLIC	PYRITE BRONZE	CUSTOM (SPECIFY)	
<b>6.</b>	<b>OP</b>			<b>SD</b>			<b>FPD</b>			
	DIFFUSER	OPAL - WHITE ACRYLIC		SAND - BLASTED WHITE ACRYLIC			FAUX PERFORATED			
<b>7.</b>	---			<b>DIML</b>						
	DIMMING	NONE			LED DIMMING (0 - 10V, CURRENT - SINKING)					
<b>8.</b>	---			<b>EMR</b>						
	EMERGENCY <sup>1</sup>	NONE			REMOTE					


1. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

## TOP/BOTTOM



## FRONT

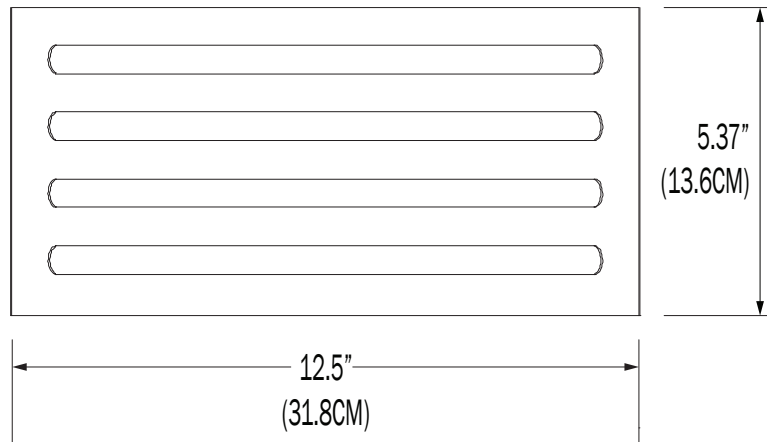


## DIRECT

PN	ILLUMINATION	LUMENS	WATTAGE
RI600HS	10LED	538	10

### IES INDOOR REPORT

PHOTOMETRIC FILENAME : RI600 HS 10LED SN OP.IES

### POLAR GRAPH

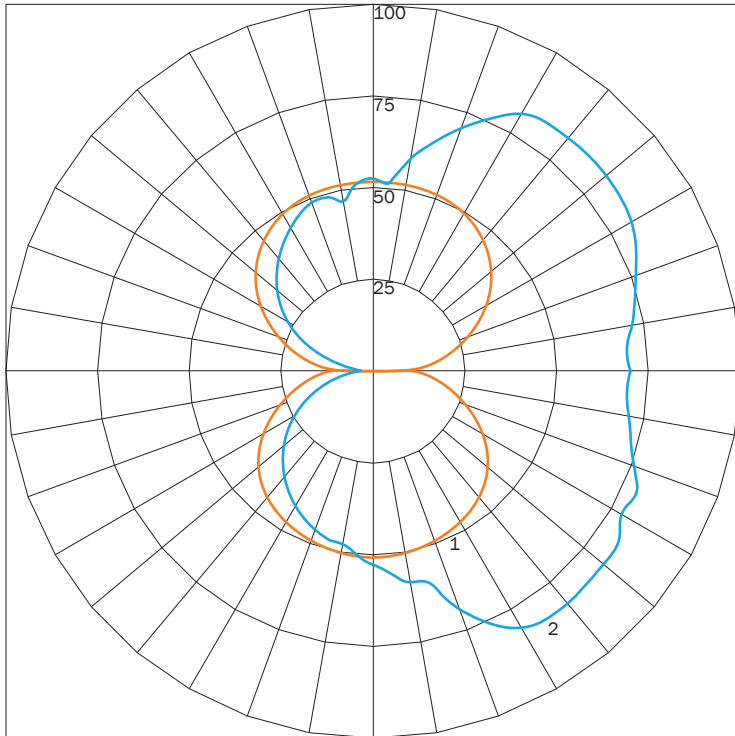

MAXIMUM CANDELA = 84.28 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 135  
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)  
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

<b>LUMINAIRE LUMENS</b>	538
<b>TOTAL LUMINAIRE EFFICIENCY</b>	NA
<b>LUMINAIRE EFFICACY RATING</b>	53
<b>TOTAL LUMINAIRE WATTS</b>	10

## AVAILABLE FINISHES



**SN**  
SATIN  
NICKEL



**CH**  
CHROME



**BC**  
BLACK  
CHROME



**AC**  
ANTIQUE  
COPPER



**AB**  
ANTIQUE  
BRASS



**SB**  
SATIN  
BRASS



**PB**  
POLISHED  
BRASS



**F04**  
GLOSS  
WHITE



**F05**  
GLOSS  
WHITE



**F09**  
PEWTER



**F15**  
MATTE  
BLACK



**F16**  
GLOSS  
BLACK



**F18**  
SATIN  
ALUMINUM



**F24**  
MELTED  
PLATINUM



**F25**  
MELTED  
GOLD



**F26**  
MELTED  
COPPER



**F31**  
SILVER  
METALLIC



**F33**  
PYRITE  
BRONZE



**RAL**  
CUSTOM  
COLOR  
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.