

PROJECT: _____


TYPE: _____

QUANTITY: _____



PN: SWW1

APPLICATION	• WALL MOUNT • INDOOR OR OUTDOOR RATED
DIMENSION	• 4.125" DIA (10.8CM)
ILLUMINATION	• DIFFUSE • LED 90CRI • 1,495 - 2,029 LUMENS
ELECTRICAL	• 120V, 277V AND 347V • 10kA SURGE SUPPRESSION STANDARD
DIFFUSERS	• CLEAR OR FROSTED, ELONGATED, GLASS GLOBE
MOUNTING	• WALL, MOUNTED TO A 4"(10CM) J-BOX
CONSTRUCTION	• ALUMINUM AND TEMPERED GLASS
FINISHES	• NATURAL AND AVAILABLE IN SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
WEIGHT	• 5 LB MAXIMUM



DIFFUSE



SEAWIND™ WALL

PROJECT: _____

TYPE: _____

QUANTITY: _____

SWW1 - 1 - 2 - 3 - 4 - 5 - 6 -

1.	150IN	15LED						
ILLUMINATION	150W INC	15W LED						
LED (W)	150W	15W						
LUMENS	2029	1430						

2.	---	30K	35K	40K
LED CCT	NONE	3000K	3500K	4000K

3.	120	277	347
VOLTAGE	120V	277V	347V

4.	ADDITIONAL AND PREMIUM FINISHES AVAILABLE. SEE FINISHES CHART	F04	F05	F15	F16	F09	F31	F18
FINISH		MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM

5.	G1	G2
GLOBE/LENS	CLEAR, ELONGATED GLOBE	FROSTED GLOBE

6.	---	EMR	EMCR
EMERGENCY ¹	NONE	REMOTE	REMOTE COLD PACK

1. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277 SYSTEMS


NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

TMSLIGHTING




SWW1

PROFILE

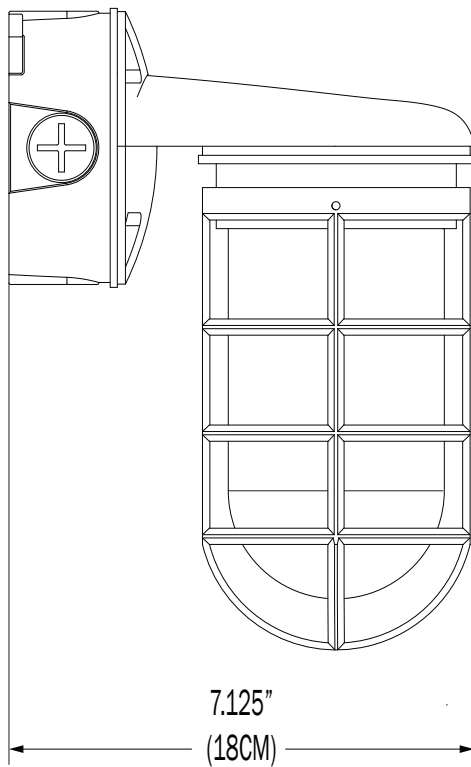

FRONT

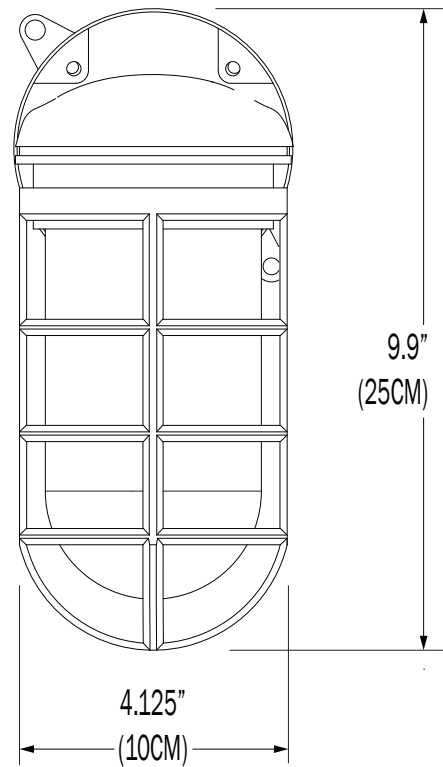

CUSTOM


NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>

DIFFUSE

PN	ILLUMINATION	LUMENS	WATTAGE
SWW1	15LED	1495	15
	150IN	2029	150

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SWW1 15LED.IES

POLAR GRAPH

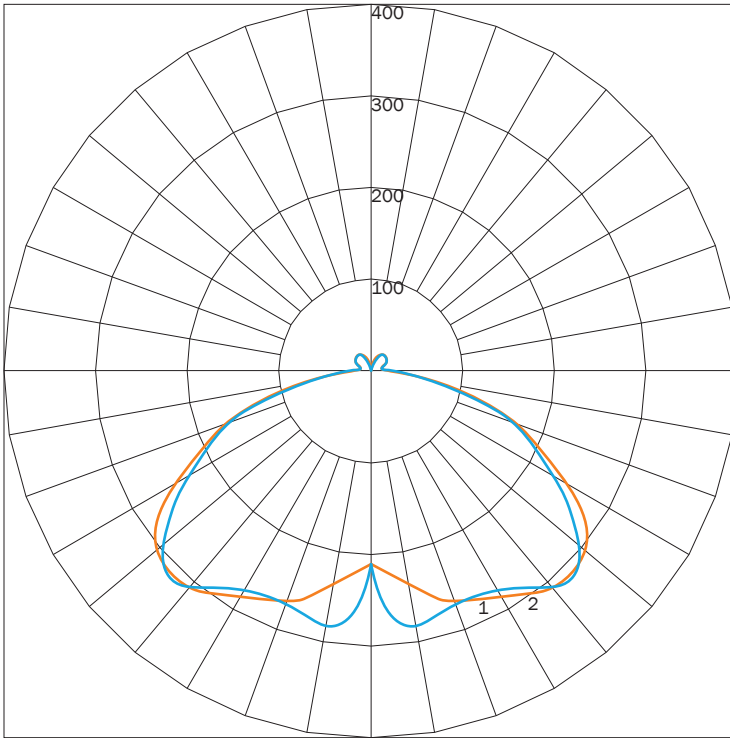


MAXIMUM CANDELA = 381.37 LOCATED AT HORIZONTAL ANGLE = 135, VERTICAL ANGLE = 15
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

1495
 NA
 88
 17

IES INDOOR REPORT
PHOTOMETRIC FILENAME : SWW1 150IN.IES

POLAR GRAPH

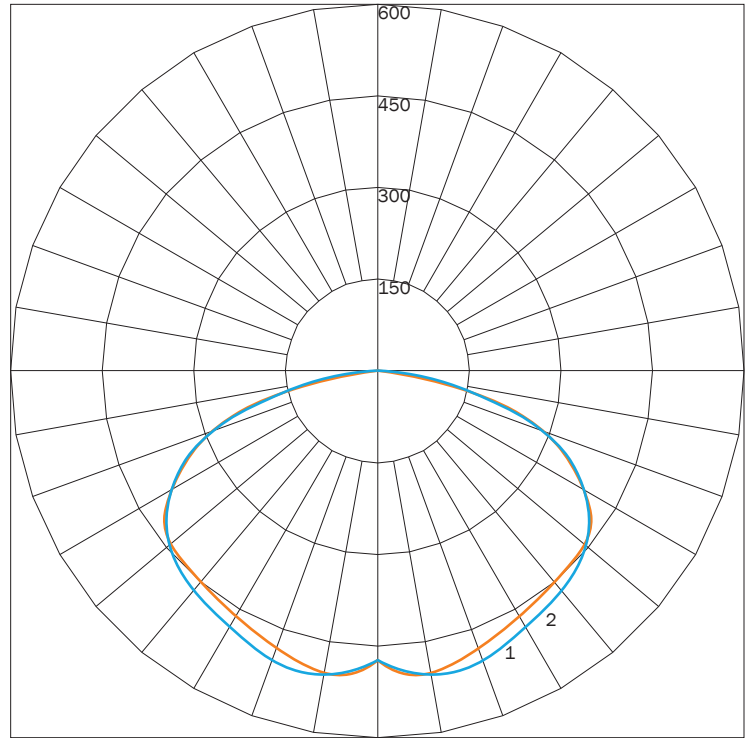

MAXIMUM CANDELA = 546.289 LOCATED AT HORIZONTAL ANGLE = 22.5, VERTICAL ANGLE = 5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS
TOTAL LUMINAIRE EFFICIENCY
LUMINAIRE EFFICACY RATING
TOTAL LUMINAIRE WATTS

2029
 NA
 14
 150

FINISHES



F04
MATTE
WHITE



F05
GLOSS
WHITE



F15
MATTE
BLACK



F16
GLOSS
BLACK



F09
PEWTER




F31
SILVER
METALLIC



F18
SATIN
ALUMINUM



F21
ARCH
BRONZE



NAT^{1 2}
NATURAL
UNFINISHED)

PREMIUM FINISHES



F40
BUBBLE
PINK



F10
FIRE
RED



F41
ELECTRIC
PURPLE



F08
MIDNIGHT
BLUE



F39
AQUA
BLUE



F13
FOREST
GREEN



F38
MEADOW
GREEN



F45¹
COPPER
METALLIC



F06
CLAY
BROWN



F11
CITRUS
ORANGE



F28
DARK
CHAMPAGNE



F22
HARVEST
GOLD



F14
SUNSHINE
YELLOW



F33
PYRITE
BRONZE



F07
ZEUS
BROWN




F32
BRONZE
METALLIC



F26
MELTED
COPPER



F25
MELTED
GOLD



F24
MELTED
PLATINUM



F43
FAUX
GOLD



F42
FAUX
CHROME



RAL
CUSTOM
(RAL #)

NOTE: DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.